
CobiNet
*Producing Network Performance*

# *Patch panel CobiNet KS 483 mm, 19", 24x, 1 RU*

## Application

The patch panel CobiNet KS is part of the *CobiNet KS* modular connection system. The panel is used for assembling  RJ45 jacks and adapters in 19" frames.

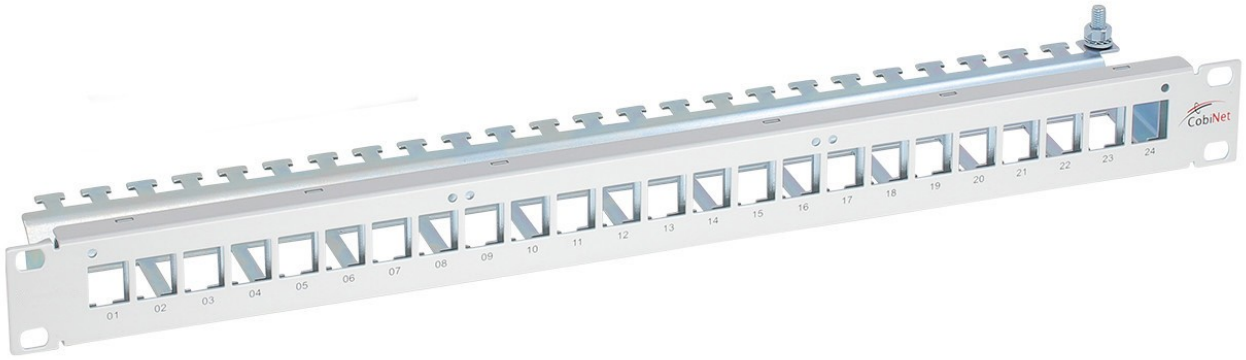


Item No. 115947

## Features and Design

- Capacity CobiDat modules.....up to 24
- Labelled with numbers 1...24
- Grounding bolt M6
- Contacts.....downward
- Colours
  - Item No. 115947.....RAL 7035 (light grey)
  - Item No. 116292.....RAL 9005 (jet black)
- Incl. fastening-parts kit, grounding cable and cable ties
- Option accessory
  - Labelling strip in plastic holder.....116533

CobiNet
*Producing Network Performance*

## Technical Specification

### Mechanical values

- Material
  - Frame.....sheet steel, zinc-plated
  - Front plate.....sheet steel, powder-coated
- Dimensions
  - Width.....482.6 mm
  - Height.....43.5 mm
  - Depth.....75.6 mm
  - Fastening dimension.....465 mm
- Weight..... approx. 700 g

### Climate area

For application in dry or damp areas without condensation

- Temperature range.....-40 to +70 °C (-40 to 158 °F)